

Features, Benefits & Functions

Extra 1.5-inch (38.1 mm) Knockout for Bundling

Provides for easier installation, less installation time.

Commercial Grade Main Breaker

- 35 kAIC series rated main breaker in 150-225 ampere loadcenters. *Highest in the industry*
- 42 and 100 kAIC series ratings available.

Drywall Marking on Enclosure

Indicates proper mounting depth for flush applications.

One-Piece Silver Flash Plated Copper Bus


Provides superior conductivity throughout the entire product line. *Industry Exclusive!*

Unique Sandalwood Finish

Immediately recognizable, aesthetically appealing, scratch-resistant powder coating. *Industry Exclusive!*

Convertible Styles Available

- Uses field installable main breaker or main lug kits.
- Flexible inventory – same breaker is used in loadcenter and circuit breaker enclosures.

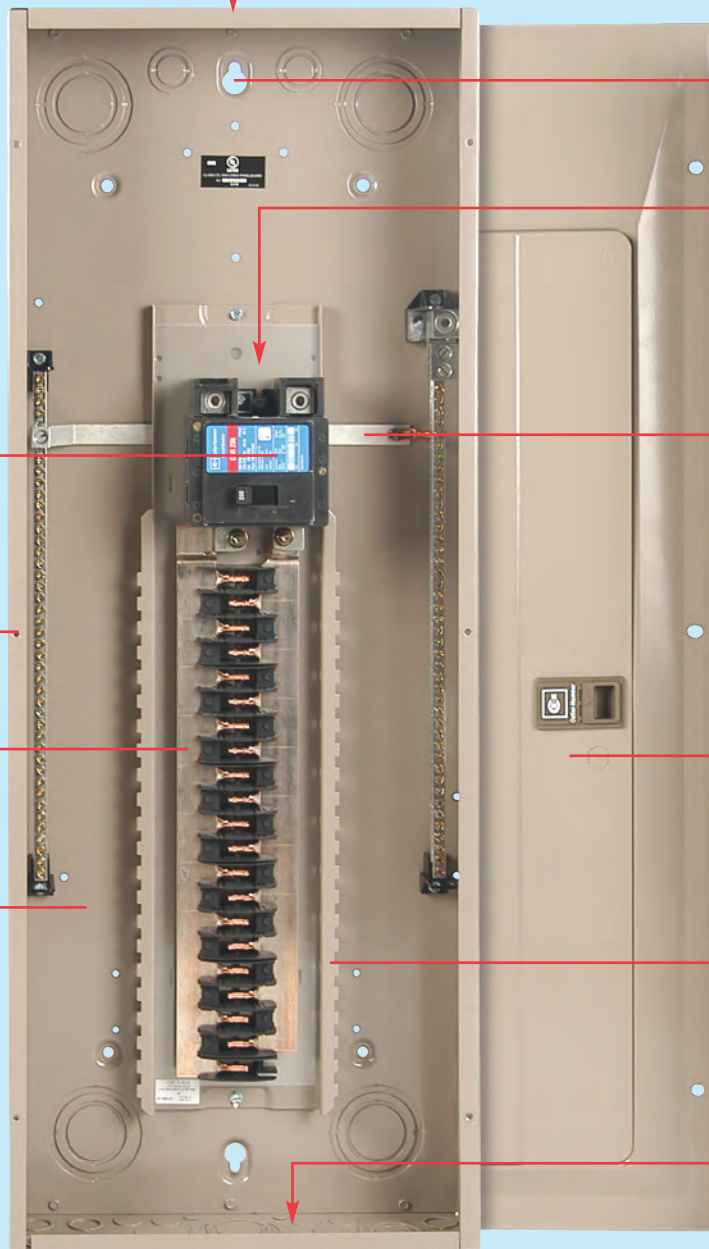

Single Keyhole Mounting

Just one keyhole at top and bottom for easier mounting and leveling.

Top or Bottom Feed

- Straight-in wiring saves labor and material.
- Only one panel for either application – no modifications necessary.

Neutral Design (For styles as indicated)

- Bonding strap is easily removable for sub-panel applications providing a ground and neutral.
- Factory bonded for service entrance applications providing a split neutral.
- Ample additional 2/0 lugs provided; no kits necessary.
- 200% size neutral.

Separately Packaged Covers

- Full line of “true” surface and combination covers.
- Built-in flush leveling feature.
- Choice of circuit identification by breaker labels or circuit directory.

Steel Backpan

- Provides positive, reliable breaker mounting.
- Industry's only one-piece design provides superior stability.

Improved Endwall Knockouts

Larger KOs are balanced to enhance installed appearance and to ease use of existing wiring. Main incoming knockout is tangential style for ease of installation.

Type CH Loadcenter